


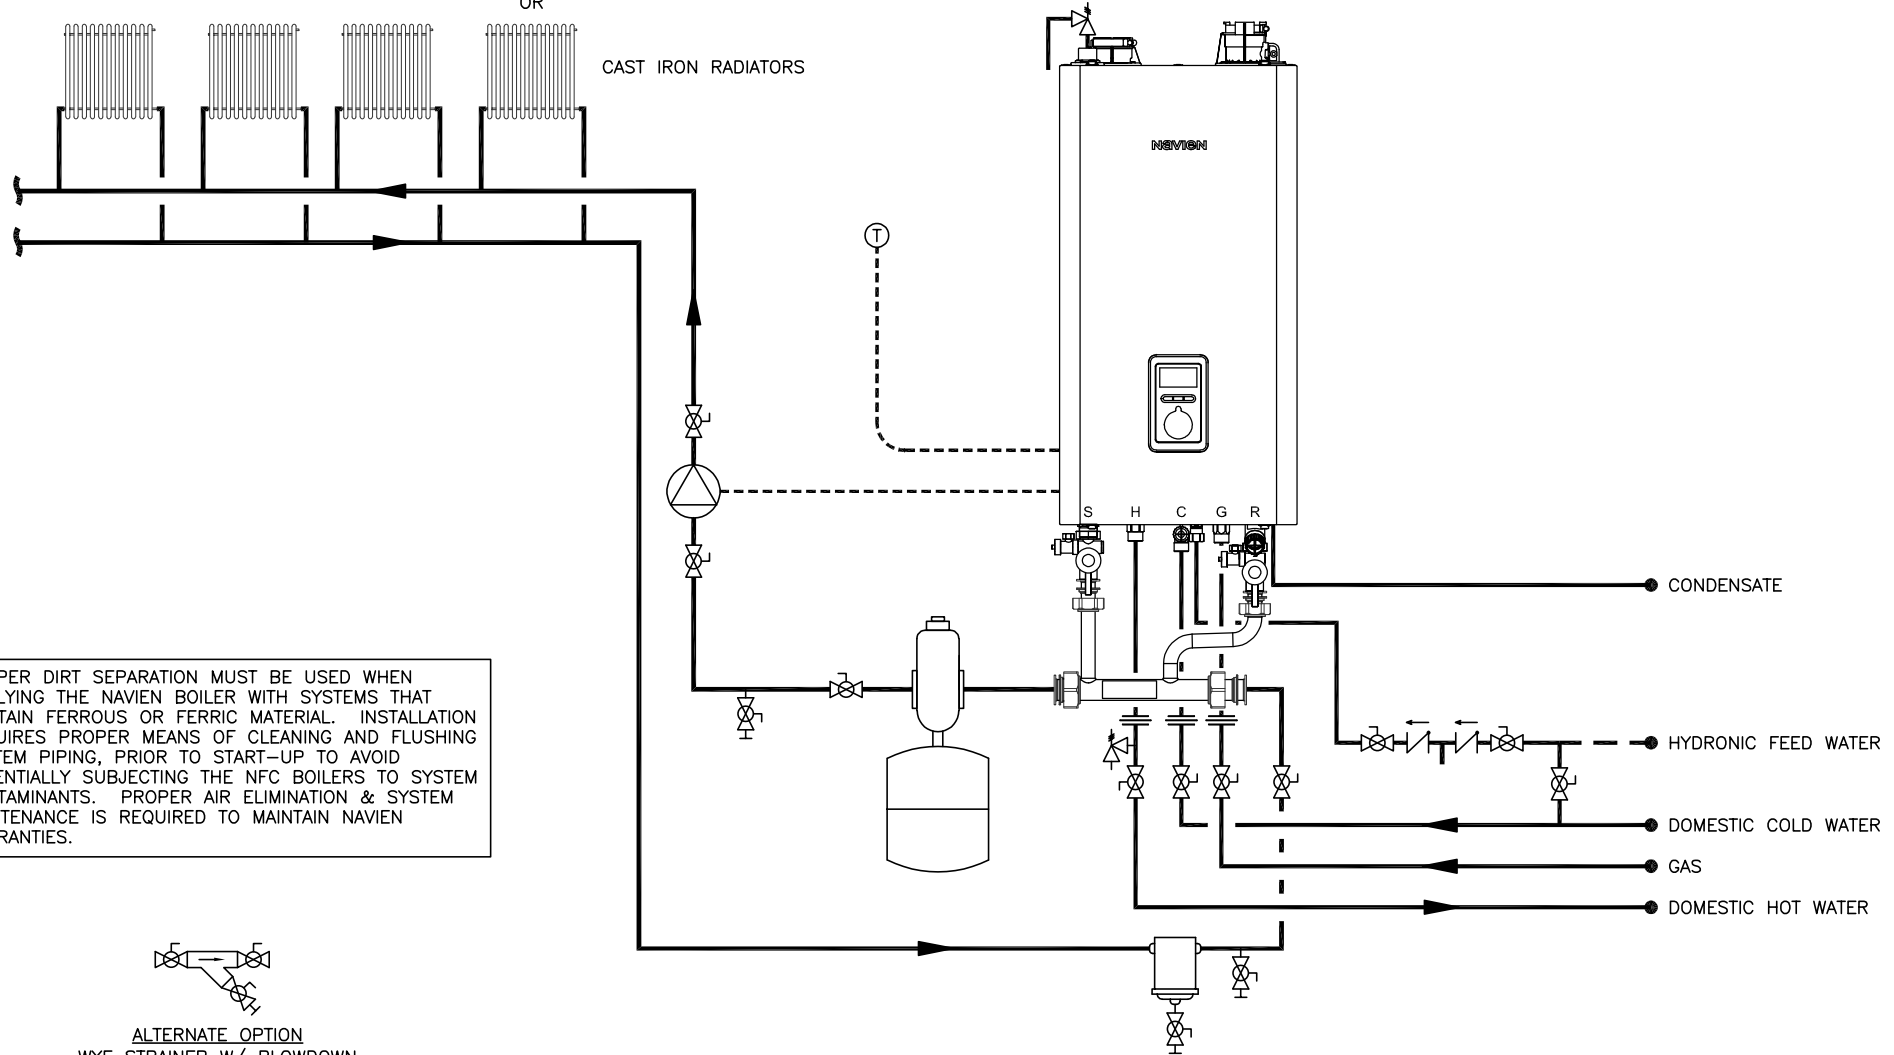



THIS DRAWING IS INTENDED ONLY AS A GUIDE AND NOT AS A REPLACEMENT FOR PROFESSIONALLY ENGINEERED PROJECT DRAWINGS. THIS CONCEPT SYSTEM DRAWING DOES NOT IMPLY COMPLIANCE WITH LOCAL BUILDING CODES. ACTUAL INSTALLATION MAY VARY DEPENDING ON INSTALLATION LOCATION AND PARAMETERS AND IT MUST BE DONE IN ACCORDANCE TO ALL LOCAL BUILDING CODES. VERIFY WITH LOCAL BUILDINGS OFFICIALS BEFORE COMMENCEMENT OF SYSTEM INSTALLATION. CHANGES OR MODIFICATIONS TO PIPING OR DESIGN IS NOT TO BE PERFORMED WITHOUT EXPRESSED WRITTEN PERMISSION BY NAVIEN, INC.














NFC-H UNIT CAN INTERNALLY CONTROL UP TO 3 ZONE CIRCULATORS, WITHOUT A ZONE CONTROL PANEL INSTALLED. ANY ADDITIONAL ZONES SHALL REQUIRE A CIRC ZONE PANEL. REFER TO NAVIEN I & O MANUAL FOR ADDITIONAL INFORMATION.

 CAST IRON BASEBOARD
 OR
 CAST IRON FIN TUBE
 OR
 CAST IRON RADIATORS



PROPER DIRT SEPARATION MUST BE USED WHEN APPLYING THE NAVIEN BOILER WITH SYSTEMS THAT CONTAIN FERROUS OR FERRIC MATERIAL. INSTALLATION REQUIRES PROPER MEANS OF CLEANING AND FLUSHING SYSTEM PIPING, PRIOR TO START-UP TO AVOID POTENTIALLY SUBJECTING THE NFC BOILERS TO SYSTEM CONTAMINANTS. PROPER AIR ELIMINATION & SYSTEM MAINTENANCE IS REQUIRED TO MAINTAIN NAVIEN WARRANTIES.


 ALTERNATE OPTION
 WYE STRAINER W/ BLOWDOWN

SYMBOL LEGEND			
	BACKFLOW PREVENTER		CHECK VALVE
	FULL-PORT VALVE		EXPANSION TANK
	CONTROL WIRING		PRESSURE RELIEF VALVE
	MANIFOLD		CIRCULATOR
	AIR ELIMINATION		THERMOSTAT
	UNION		DIRT SEPARATOR
			BALL DRAIN VALVE


 20 GOODYEAR
 IRVINE, CA 92618
 800-519-8794
 www.navienc.com

NFC-H SERIES COMBI-BOILER
 (1) NFC-H COMBI-BOILER WITH TWO-PIPE DIRECT RETURN
 SHOWN WITH NAVIEN MANIFOLD KIT PART#30026576B
 INCLUDES MODELS NFC-250/175H, NFC-250/200H
 DRAWN BY: S. STOEKE NFC-H-1-CI-2P-DR-PLSS MARCH 7, 2023